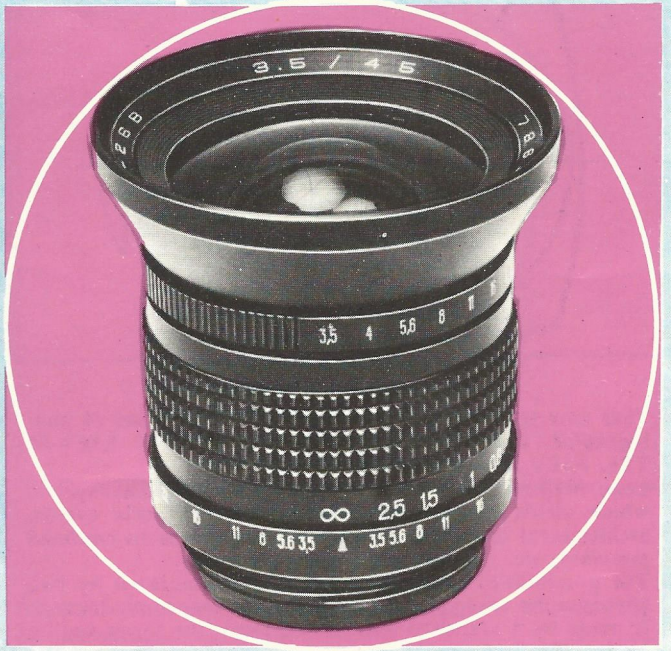

INSTRUCTIONS FOR USE

PHOTOGRAPHIC LENS MIR-26

TENTO

USSR
MOSCOW

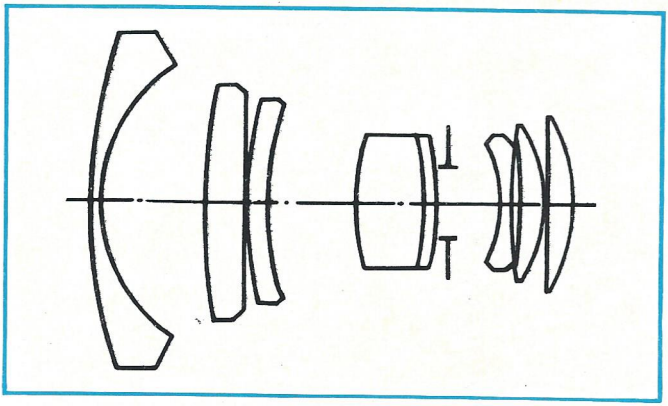

Your new lens extends the operating possibilities of photographic cameras KIEV-6C, KIEV-6C TTL, KIEV-60 TTL, KIEV 88 and KIEV 88 TTL.

Lens MIR-26 is a wide-angle eight-lens optical system which yields high-quality photographs of sports events, architectural ensembles, when taking pictures in confined premises, etc.

The possibilities of lens operation are illustrated by two photographs taken from one point. The upper photograph is made by a standard lens ($f=80$ mm), the lower one — by lens MIR-26 ($f=45$ mm).

The lens is fitted with a mechanism of presetting the diaphragm, this permits sighting and focusing with a full aperture.

The MIR-26B lens with a threaded bayonet is produced for cameras KIEV 88 and KIEV 88 TTL; the MIR-26Б lens provided with the bayonet with a captive nut is produced for cameras KIEV-6C, KIEV-6C TTL and KIEV-60 TTL. The MIR-26Б lens can be also used when photographing with the PENTACON SIX camera.

$f = 80$ mm

$f = 45$ mm

TECHNICAL DATA

Picture size, mm	60×60
Focal length, mm	45
Diaphragm setting range	from 3.5 to 22
Angle of field of vision	83°
Focusing range, m	from 0.5 to ∞
Working distance, mm:	
for cameras KIEV 88 and KIEV 88 TTL	82.1
for cameras KIEV-6C, KIEV-6C TTL and KIEV-60 TTL	74
Thread for light filters	M82×0.75
Maximum diameter, mm	89
Length, mm, not over	98
Mass, kg, not over	0.7

DELIVERY SET

Lens	1
Front cap	1
Rear cap	1
Light filters:	
УФ-1^{x} (UV-1^{x})	1
ЖЗ-1.4^{x} (YG-1.4^{x})	1
Case	1
Instructions for use	1
Packing box	1

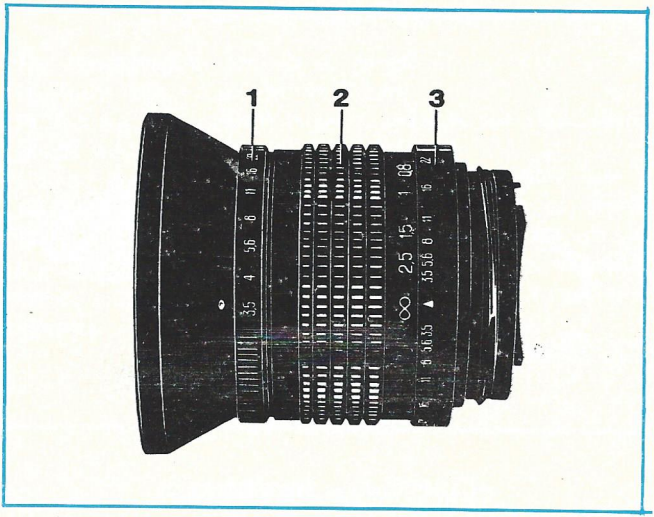

HOW TO USE THE LENS

Fit on and remove the lens as instructed in the manuals to photographic cameras.

Set the diaphragm by rotating ring *1*. The diaphragm shuts to the selected value automatically when the release button is depressed.

Definition of image is attained by rotating ring *2* on which the distance scale is marked.

The depth of definition can be determined by means of scale *3* on the distance scale depending on the distance to the subject and the selected diaphragm value.

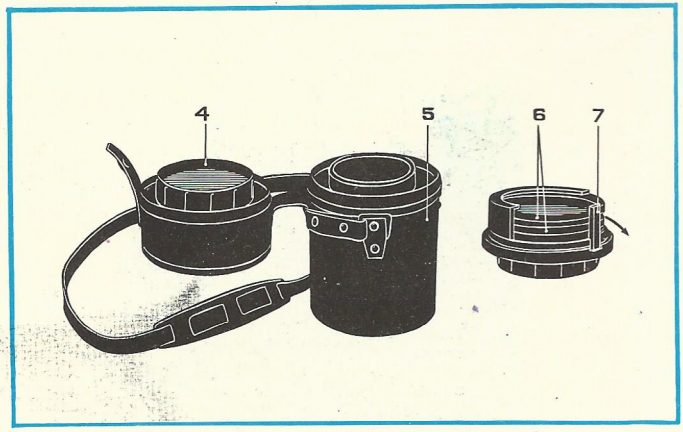

USE OF LIGHT FILTERS

The lens is fitted with light filters УФ-1^{X} (UV-1^{X}) and ЖЗ-1.4^{X} (YG-1.4^{X}).

Light filter УФ-1^{X} (UV-1^{X}) is colourless and is used for weakening the influence of ultraviolet rays, e. g. when taking pictures in high mountains or when using a colour film.

Light filter ЖЗ-1.4^{X} (YG-1.4^{X}) is light, yellow-green, improves the tone rendition of multi-coloured subjects on highly-sensitive photographic materials with only insignificant loss of their sensitivity. With a medium-sensitive photographic materials practically correct multi-coloured subject tone rendition is attained. Light filters *6* are arranged in special body *4* screwed into a cap of case *5*.

To take the light filters out of the body, push catch *7* in direction marked by the arrow.

STORAGE AND UPKEEP

The photographic lens is a complicated optical device and must be handled with great care.

Protect the lens against impacts, sharp temperature changes as well as against dust and moisture.

Having brought the lens from the frosty weather into a warm room, do not open it immediately, let it get warm to avoid sweating of the optical surfaces. Should dust or moisture get on the lens parts, remove it with a soft little brush, cloth or cotton wad moistened in spirit-and-ether mixture.

ACCEPTANCE CERTIFICATE

It is hereby certified that photographic lens _____,

Serial No. _____, complies with the engineering documentation and is approved for service.

Date of release _____

Signature of persons responsible

for acceptance _____

Внешторгиздат. Изд. № 285У/85.
Англ. яз. О. Зак. А-199.

TENTO

USSR
MOSCOW